



POST DETAIL

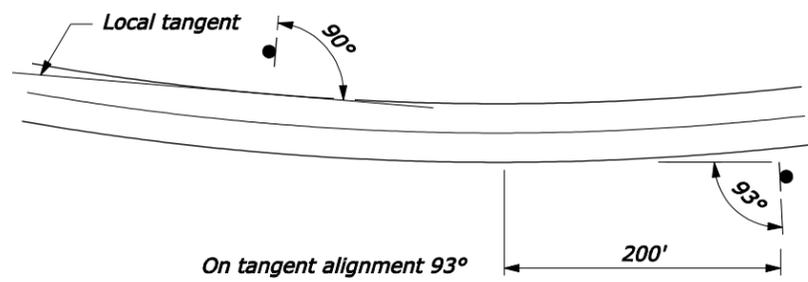

SIGN INSTALLATION ANGLE

NOTE:

1. Use Type III or higher type sheeting on all signs and channelizing devices. Warning lights are not normally needed on devices with Type III or higher type sheeting, but may be beneficial to attract the drivers attention in fog or other special conditions. When used, apply the appropriate type of warning light (Type A, B, C, or D) per the MUTCD Chapter 6F.
2. Ensure all sign supports exposed to impact by traffic meet the requirements of NCHRP-350 for crash worthiness.
3. Do not store traffic control devices along the roadway when not in use. Cover post-mounted signs when not applicable.
4. State standards may be used as an alternative if approved by the CO.

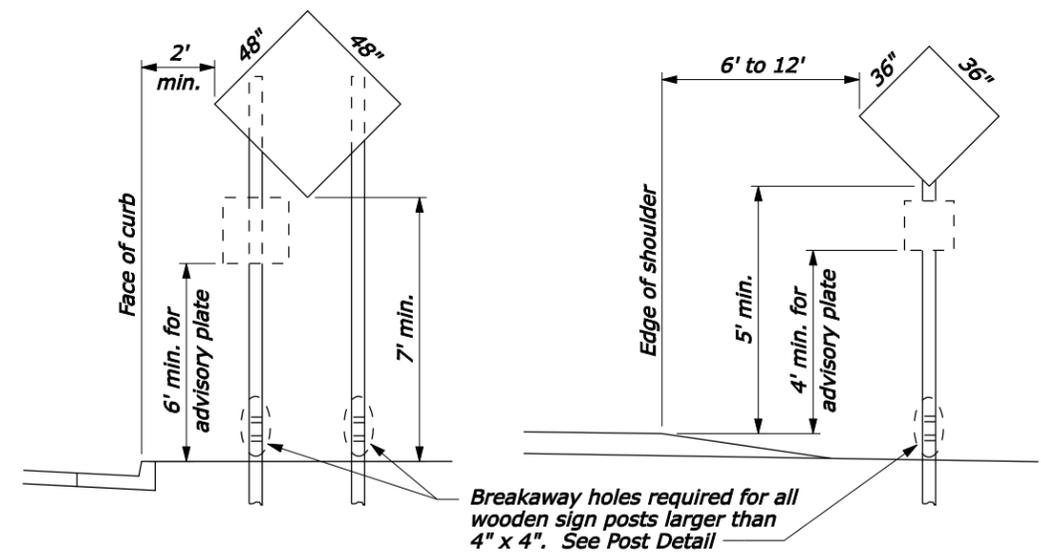

URBAN AREAS
(or pedestrian or parking areas)

RURAL AREAS

NOTE: Mount signs with area 9 sqft and under on a single 4" x 4" wood post. Use double wood posts for signs wider than 36" or signs with an area over 9 sqft. Steel may be used in lieu of wood posts (See Note 2)

SIGN PLACEMENT

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION FEDERAL LANDS HIGHWAY	
U.S. CUSTOMARY STANDARD	
TEMPORARY TRAFFIC CONTROL SIGN INSTALLATION	
STANDARD APPROVED FOR USE 6/2005	STANDARD
REVISED: DRAFT: 11/2007	635-14