STATE	PROJECT	SHEET NUMBER
WA	PFH 208-1(1)	A.1

U. S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

PLANS FOR PROPOSED PROJECT

WA PFH 208–1(1)

CAMP GRISDALE ROAD

OLYMPIC NATIONAL FOREST
GRAYS HARBOR COUNTY
WASHINGTON

LENGTH 11.671 MILES

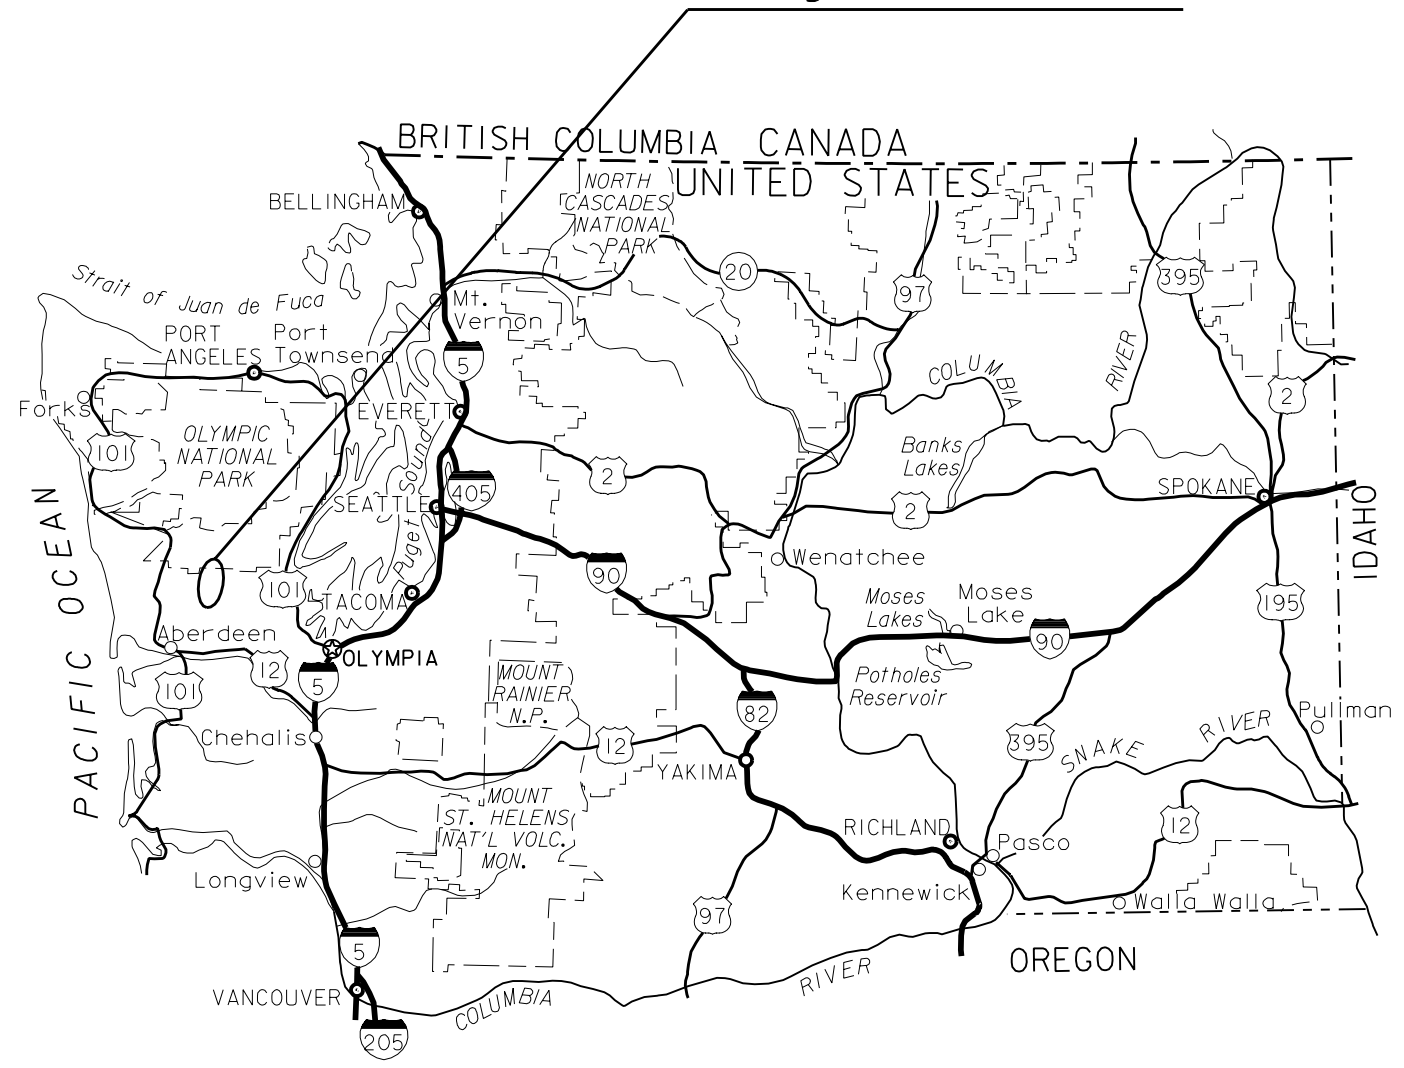

WASHINGTON KEY MAP

TYPE OF CONSTRUCTION:

Grading, base, asphalt concrete pavement, bridge, and drainage

DESIGN DESIGNATION:

ADT (2000)	*250*
ADT (2020)	*500*
V	*40 MPH*
e (max)	*0.080*

SPECIFICATION:

Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects, FP-03 US Customary Units

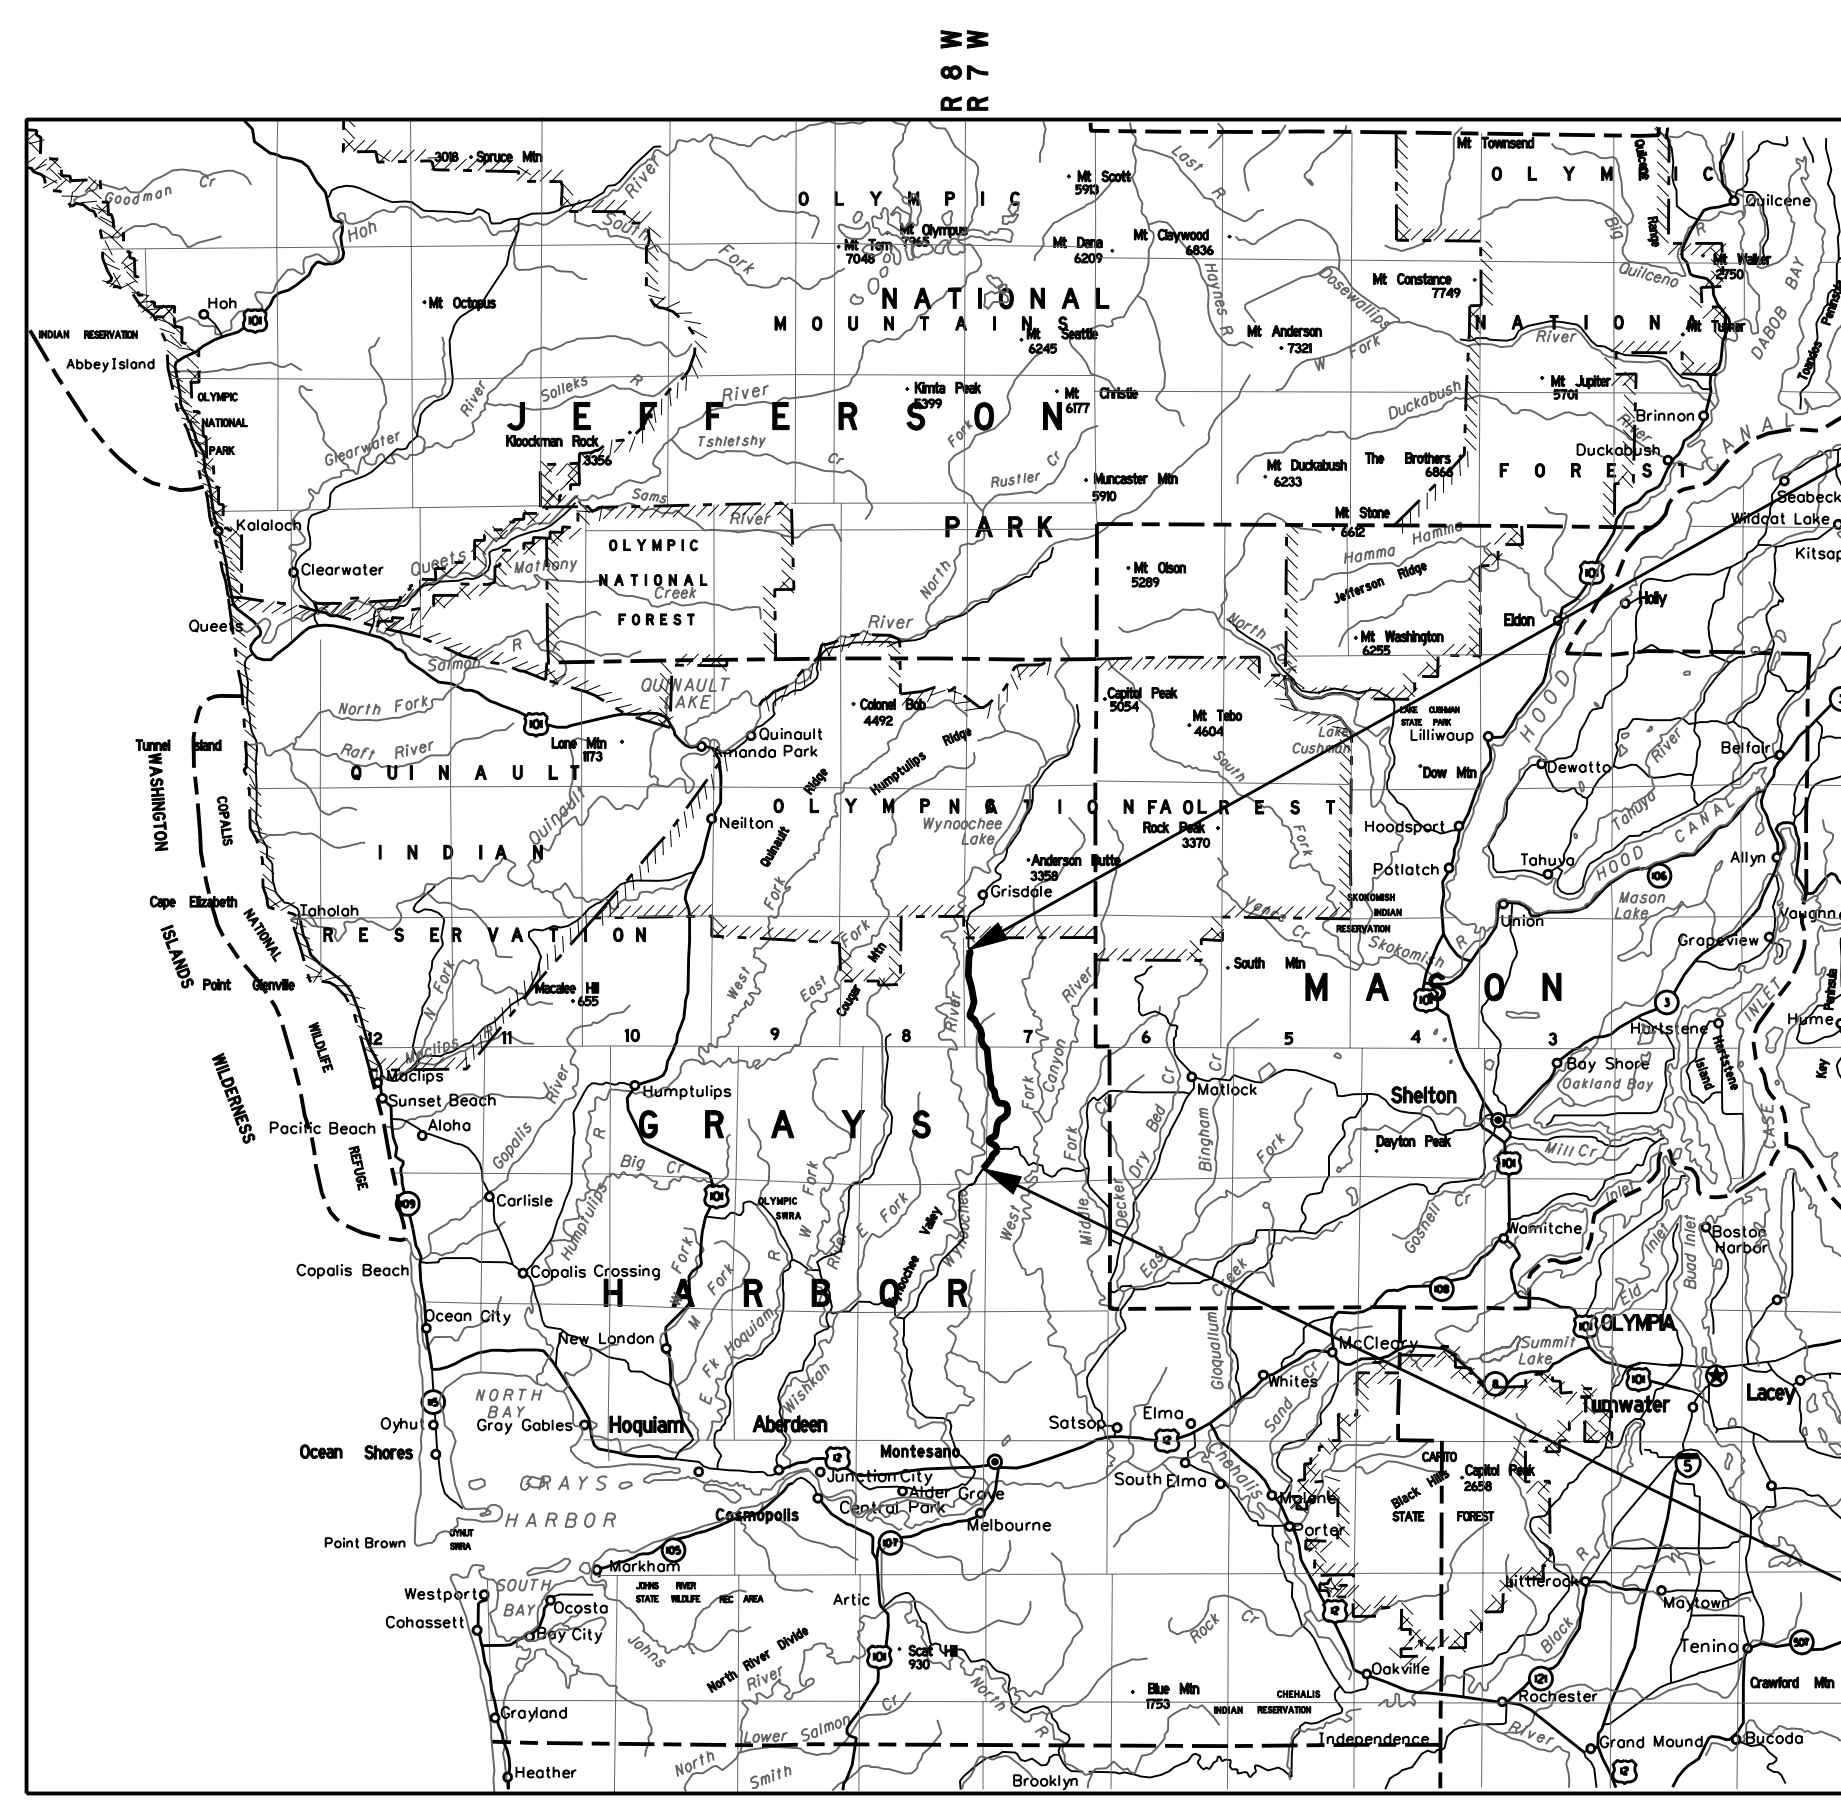

0 8 16 24
SCALE IN MILES

PLANS PREPARED FOR

FEDERAL LANDS HIGHWAY
COMMITMENT TO EXCELLENCE

PLANS PREPARED BY

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

WESTERN FEDERAL LANDS HIGHWAY DIVISION
VANCOUVER, WASHINGTON

PLANS PREPARED BY

ROBERT PECCIA & ASSOCIATES

ROBERT PECCIA AND ASSOCIATES
HELENA, MONTANA

INDEX TO SHEETS

A. GENERAL INFORMATION
A.1 TITLE SHEET
A.2 PLAN SYMBOLS AND ABBREVIATIONS
A.3 VICINITY MAP
B. SUMMARIES
B.1-5 SUMMARY OF QUANTITIES
C. TYPICAL SECTION
C.1 TABULATION OF TYPICAL SECTION QUANTITIES
C.2 TYPICAL SECTIONS
C.3 SUBEXCAVATION DETAILS
D. PLAN-PROFILE
D.1-3 TABULATION OF PLAN AND PROFILE QUANTITIES
D.4-24 PLAN AND PROFILE
E. APPROACH ROADS
E.1-3 TABULATION OF APPROACH ROAD QUANTITIES
E.4-12 APPROACH ROAD PLAN AND PROFILE
E.13 APPROACH ROAD TABLE
E.14-15 APPROACH ROAD DETAILS
F. EROSION CONTROL
F.1-6 TABULATION OF TEMPORARY EROSION CONTROL QUANTITIES
F.7-17 TEMPORARY EROSION CONTROL PLANS
F.18 TEMPORARY DIVERSION CHANNELS
F.19 SEDIMENT TRAPS
F.20 SEDIMENT WATTLE STANDARD DETAIL
F.21-22 EROSION CONTROL STANDARDS
G. WETLAND MITIGATION
G.1 TABULATION OF WETLAND MITGATION QUANTITIES
G.2 NEIL CREEK WETLANDS PLANT SALVAGE PLAN
G.3-4 NEIL CREEK SOUTH WETLAND MITIGATION AREA PLAN AND SECTIONS
G.5-6 NEIL CREEK NORTH WETLAND MITIGATION AREA PLAN AND SECTIONS
G.7 NEIL CREEK SOUTH WETLAND PLANTING PLAN
G.8 NEIL CREEK NORTH WETLAND PLANTING PLAN
G.9-10 WETLAND MITIGATION PLANTING DETAILS
H. DRAINAGE
H.1-4 TABULATION OF DRAINAGE QUANTITIES
H.5-12 AQUATIC ORGANISM PASSAGE CULVERT DETAILS
H.13 445+00 SCHAFER CREEK BRIDGE PLAN
H.14 445+00 SCHAFER CREEK BRIDGE CROSS SECTIONS
H.15 AQUATIC ORGANISM PASSAGE CULVERT RIPRAP HEADWALL AND OUTLET CONTROL SYSTEM DETAILS
H.16 CULVERT INTERIOR INFILL TREATMENTS
H.17 STONE SILL DETAILS
H.18 ENERGY DISSIPATOR AND RIPRAP DITCH DETAILS
H.19-26 DRAINAGE STANDARDS
I. SAFETY FEATURES
I.1-6 GUARDRAIL STANDARDS
J. MISCELLANEOUS
J.1 ROADWAY OBLITERATION DETAILS
J.2 ROADWAY OBLITERATION 120+00 TO 140+00
J.3 MONUMENT LOCATIONS
J.4 MONUMENT DETAILS
K. TEMPORARY TRAFFIC CONTROL
K.1 TABULATION OF TEMPORARY TRAFFIC CONTROL QUANTITIES
K.2 TEMPORARY TRAFFIC CONTROL SIGNING PLAN
K.3 TEMPORARY TRAFFIC CONTROL SIGN IDENTIFICATION
K.4 TEMPORARY TRAFFIC CONTROL ROAD CLOSURE
K.5-11 TEMPORARY TRAFFIC CONTROL STANDARDS
L. PERMANENT TRAFFIC CONTROL
L.1-2 TABULATION OF PERMANENT TRAFFIC CONTROL QUANTITIES
L.3-13 SIGNING AND PAVEMENT MARKING PLANS
L.14 PERMANENT SIGN DETAILS
L.15 PAVEMENT MARKING DETAILS
L.16 DELINEATOR DETAILS
L.17 PERMANENT SIGN INSTALLATION STANDARD DETAIL
M. BRIDGE PLANS
M.1-16 BRIDGE PLANS

RECOMMENDED:

/s/ Michael S. Traffalis DATE 11/06/07
Design Operations Engineer,
Western Federal Lands Highway Division

APPROVED:

/s/ Robert B. Lale DATE 11/06/07
Director, Project Delivery,
Western Federal Lands Highway Division

03/2006 BRIAN WACKER Checked by: 03/2006 BRAD THOMPSON Designed by: 14-Nov-2007 07:50 AM ...\wf2081aa.dgn